

AC-HPRO-4040

Acid-Resistant RO Membrane Element

Introduction

- ◆ The reverse osmosis series (AC-HPRO) is independently developed by Cooperate Technology for selective special separation. Adopting proprietary membrane material manufacturing technology, this series enables long-term and stable operation under acidic conditions (pH 1-10).

Application

- ◆ Hydrometallurgy / Non-ferrous Metals Industry
- ◆ Waste acid recovery and Acid Washing Industry
- ◆ Fine Chemicals & Pharmaceutical Intermediates
- ◆ The electronics and Surface Treatment Industry
- ◆ Separation of special chemical materials



Parameters

Model	Typical Stabilized Salt Rejection (%)	Minimum Salt Rejection (%)	Permeate Flow Rate GPD (m ³ /d)	Area ft ² (m ²)
AC-HPRO-4040	99.7	99.5%	1500 (5.7)	80 (7.5)

Test Condition

Test Solution	Tem. (°C)	pH	Pressure psi (MPa)	Recovery (%)
32000mg/L NaCl	25	7.0	800 psi (5.5MPa)	8

- ◆ Test Condition: 32000mg/L NaCl, 800 psi, 25°C, pH7
- ◆ Flow rates for individual elements may vary but will be no more than ±15%
- ◆ Active area guaranteed ±3%


Using Conditions

Maximum Operating Pressure	1300 psi(8.96MPa)
Maximum Operating Temperature	60 °C
Maximum Feed Flow	16GPM (3.6m ³ /h)
Maximum Feed Silt Density Index (SDI)	5.0
Application Environment (pH)	1-10
Short-Term Cleaning (30 min.) pH Range	1-13
Maximum Pressure Drop Per Element	15psi (0.1Mpa)

Cautions

- ◆ When the membrane element is first used, the water produced during the first hour should be discharged and not used.
- ◆ When the membrane element is manufactured, the dry type membrane element has no protective liquid. Once the element gets wet, it should remain in a moist state.
- ◆ The feed water pressure should be gradually increased within a time range of 30-60 seconds. Otherwise, it may cause irreversible damage to the membrane element.
- ◆ At any time, back pressure on the water production side should be avoided.
- ◆ The wet type membrane element is tested with water before leaving the factory, and is stored with a 1.5% sodium bisulfite solution (in winter, 10% propylene glycol antifreeze solution needs to be added). Then it is vacuum-packed.
- ◆ When the system is shut down for a long time, to prevent the growth of microorganisms, it is recommended to immerse the membrane element in a 1.5% (by weight) sodium bisulfite protective liquid and replace the protective liquid regularly.
- ◆ Users must strictly follow the operation limits and rules set in this manual. Otherwise, the company will not bear any consequences arising therefrom.
- ◆ Users are strictly prohibited from using any chemical substances that are destructive to the membrane element during storage and operation. If such chemical substances are used, the company will not bear any consequences arising therefrom.

Dimensions and Packaging

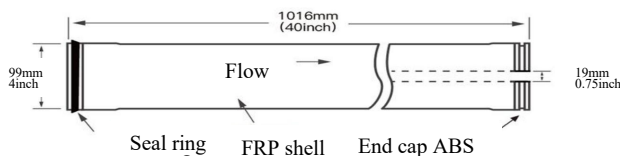

Package Size: 1060*130*130 mm



Connector material code
3.02.09.0006

